



Fuel Prep Year Round Diesel Fuel Conditioner
 Ready for use in BioDiesel. ULSD compliant. Eliminates bacterial and fungal growth. Eliminates and disperses sludge. Lubricates fuel system and cleans injectors. Prevents corrosion. Conditions fuel.

Net Content 12 fl. oz.

PR-10012



Fuel Prep Year Round Diesel Fuel Conditioner
 Ready for use in BioDiesel. ULSD compliant. Eliminates bacterial and fungal growth. Eliminates and disperses sludge. Lubricates fuel system and cleans injectors. Prevents corrosion. Conditions fuel.

Net Content 32 fl. oz.

PR-10032



Cool Tec® 2 Cooling System Treatment
 Cooling system treatment with coolant stabilizer. Eliminates corrosion, scale build-up and retards the formation of solder bloom. Rebuilds and maintains pH levels in recycled coolant. Compatible with all types of antifreeze.

Net Content 12 fl. oz.

PR-1112



Diesel Cooling Treatment
 Complete inhibitor package designed exclusively for use in diesel cooling systems. Protects all metals, helps stabilize coolant and helps prevent cavitation erosion/corrosion. Lubricates water pump, reduces downtime and has no harmful effects on rubber parts and gaskets. Compatible with coolant water filters and helps maintain optimum heat transfer levels. (12 fl. oz. treats 4 gal. of coolant.)

Net Content 12 fl. oz.

PR-1816



Winter Pow-R Plus® Diesel Fuel Treatment
 ULSD compliant. Prevents gelling of diesel fuel. Prevents ice crystal formation. Reduces cold filter plug point b as much as 30°F. Helps enhance cetane. Helps improve fuel economy. Utilizes HAFI® technology. Improves cold weather starting. Stabilizes and prevents corrosion. Helps reduce emissions. Helps improve lubricity.

Net Content 12 fl. oz.

PR-20212



Winter Pow-R Plus Diesel Fuel Treatment
 ULSD compliant. Prevents gelling of diesel fuel. Prevents ice crystal formation. Reduces cold filter plug point b as much as 30°F. Helps enhance cetane. Helps improve fuel economy. Utilizes HAFI® technology. Improves cold weather starting. Stabilizes and prevents corrosion. Helps reduce emissions. Helps improve lubricity.

Net Content 32 fl. oz.

PR-20232



Winter Thaw Emergency Diesel Fuel Treatment
 Dissolves already gelled fuel fast. Reduces clogging of fuel filters. Prevents ice crystal build-up in fuel lines and filters by discharging moisture. (32 fl. oz. treats up to 25 gal. of fuel.) Eliminates hard starting, pounding, excessive smoking and helps improve combustion. 100% compatible with low sulfur fuel and fuel blends.

Net Content 32 fl. oz.

PR-202132



Pow-R Performance Diesel Fuel Enhancer
 Ready for use in BioDiesel. ULSD compliant. Lubricity additive. Cetane improver. Maximizes fuel lubrication. Increases power. Stabilizes stored fuel. Reduces Nox. Cleans injectors. Decreases fuel consumption.

Net Content 32 fl. oz.

PR-204032



Fuel Injector Cleaner
 Cleans harmful deposits and carbon from fuel system as you drive. Provides increased power and acceleration, improved idling, quicker starting and reduced emissions. Effective in all types of fuel injected cars and trucks and in all gasolines, gasohols and diesel fuels. (12 fl. oz. treats 10-20 gal. of fuel.)

Net Content 12 fl. oz.

PR-2112



CARBURETOR & CHOKE CLEANER
 Helps restore carburetor performance by removing gum, varnish, carbon deposits and dirt build-up. Cleans and frees automatic chokes, carburetor linkage, fuel injection intake systems, manifold heat controls and PCV smog valve.

Net Content 12 fl. oz.

PR-2214



Total Fuel System Cleaner
 Total Fuel System Cleaner prevents and cleans deposit buildup better than ordinary cleaners and leading brands. It neutralizes the power robbing effects of combustion chamber deposits. Improves acceleration better than ordinary fuel treatments. Prevents hesitation, sluggishness, stalling and overall poor acceleration. Synthetic technology. Containing Poly Ether Amine (PEA), Total Fuel System Cleaner removes carbon and has the ability to reduce octane requirement by cleaning combustion chambers. Contains chemistry for DIG technology. Use every 3,000 miles to insure optimum engine power and performance.

Net Content 16 fl. oz.

PR-2216



Intake Valve Deposit Cleaner
 Reduces intake valve, port and manifold deposits. Improves starting power, driveability and restores performance by removing carbon build-up. Provides upper cylinder lubrication. Helps reduce emissions in both gasoline and diesel engines. (12fl. Oz. treats up to 20 gal. of fuel.)

Net Content 12 fl. oz.

PR-2312



Fuel Injector Air Intake Cleaner
 Dissolves and helps remove sticky gums, carbon, soil and resin deposits that prevent proper air flow. Special all-angle spray valve allows container to be held at any angle which assures proper spray and pressure penetration to optimize deposit removal.

Net Weight 4 oz.

PR-2412



Total Intake System Cleaner
 Total Fuel System Cleaner prevents and cleans deposit buildup better than ordinary cleaners and leading brands. It neutralizes the power robbing effects of combustion chamber deposits. Improves acceleration better than ordinary fuel treatments. Prevents hesitation, sluggishness, stalling and overall poor acceleration.

Net Weight 7.5 oz.

PR-2512



Motor Pep Tune-Up Treatment
 Double duty additive for both oil and gasoline. Add to oil to dissolve engine varnish, gums and sludge. Frees and quiets noisy hydraulic valves and lifters. Add to gas for upper cylinder lubrication and to remove carbon from heads and pistons. (12 fl. oz. treats one oil change.)

Net Content 12 fl. oz.

PR-3016



Motor Aid Concentrated Oil Treatment

Ideal for use in all engines. Maintains engine performance and efficiency. Keeps seals and gaskets supple. Prevents corrosion and keeps engine clean. Helps maintain viscosity. Regular use will prevent excessive wear and prolong the life of engine components. (12 fl. oz. treats one oil change. For high mileage engines with advanced wear, excessive oil burning or heavy sludge deposits use two bottles.)

Net Content 12 fl. oz.

PR-3112



High Mileage Oil Treatment

Helps stop leaks due to drying, hardening or shrinking of seals. Reduces deposits. Keeps the engine clean with superior detergents. Extends engine life with anti-wear agents. Counteracts the effect of oxidation with acid neutralizers. Protects internal engine parts against deterioration, bio-fuel residue and condensation with advanced corrosion inhibitors.

Net Content 12 fl. oz.

PR-3182



Power Steering Fluid System Flush

Helps stop leaks due to drying and hardening of seals. Keeps seals soft and pliable. Cleans hydraulic systems and conditions fluids. May also be used to condition automatic transmission fluid. Compatible with all fluid types.

Net Content 12 fl. oz.

PR-3210



Silicone Spray

Stops squeaks, sticking and reduces wear of rubber weather-stripping on auto windows, doors and hoods. Effective from -35° to +325°F

Net Weight 10 oz.

PR-3416



Premium Power Steering Fluid

Meets specifications of GM, Ford, Chrysler and most foreign auto manufacturers. Decreases heat and friction. Reduces power steering fluid pump noise.

Net Cont. 12 fl oz

PR-3912



Premium Power Steering Fluid

Meets specifications of GM, Ford, Chrysler and most foreign auto manufacturers. Decreases heat and friction. Reduces power steering fluid pump noise.

Net Cont. 64 fl oz

PR-3964



Spray Glass & Utility Cleaner

Professional grade, high solvent based cleaner cuts through build-up of dirt and grime. Ideal for glass, plastic, stainless steel and porcelain coated surfaces.

Net Content 18 fl. oz.

PR-4120



Spray Engine Cleaner & Degreaser

Specially formulated to quickly dissolve grease, oil and tar from engines and equipment. Just spray on and rinse off with water. Ideal for car, truck and marine engines. Also useful for farm equipment, lawn mowers and garage floors.

Net Weight 14.5 oz.

PR-4220



Spray Rubberized Undercoat

Rustproofs, seals and protects. Sprays on evenly, dries quickly and stays black and can be painted. Contains rubber compound for flexibility.

Net Weight 17 oz.

PR-4424



Penetrant and Lubricant

Frees rusted parts and lubricates sticky parts. Penetrates, lubricates, stops rust and corrosion.

Net Weight 11 oz.

PR-4516



Non-Chlorinated Brake Cleaner

Low V.O.C. formula. Quickly and effectively dissolves and removes grease, oil, brake fluid and other contaminants from brakes, C.V. joints and clutch components. Degreases instantly, leaves no residue. Cleans without disassembly. Helps stop brake squealing and can improve braking performance.

Net Weight 14 oz.

PR-4620



Non-Chlorinated Brake Cleaner Ultra Low VOC

Ultra Low V.O.C. formula. Quickly and effectively dissolves and removes grease, oil, brake fluid and other contaminants from brakes, C.V. joints and clutch components. Approved for use in California.

Net Weight 14 oz.

PR-4720



Spray White Lithium Grease

Offers superior corrosion and friction protection. High lubricity grease works equally well in high and low temperatures and in all types of weather. Ideal for automotive, truck, marine, farm equipment and household accessories.

Net Weight 11 oz.

PR-4816



Spray Brake Cleaner

Quickly and effectively dissolves and removes grease, oil, brake fluid and other contaminants from brakes, C.V. joints and clutch components. Degreases instantly, leaves no residue. Equally efficient on electrical assemblies. Non-flammable formula. Not for use in California.

Net Weight 19 oz.

PR-4820



Spray Belt Dressing

Conditions and preserves all types of "V" belts, old and new. Belt Dressing eliminates squeaking, slipping, and increases friction coefficient. Not recommended for serpentine belts.

Net Weight 7 oz.

PR-4908



**Non-Chlorinated
Brake Cleaner**

20% V.O.C. formula. Approved for use in California. Not for use in SCAQMD. Quickly and effectively dissolves and removes grease, oil, brake fluid and other contaminants from brakes, C.V. joints and clutch components. Cleans without disassembly. Helps stop brake squealing. Leaves no residue.

Net Weight 14 oz.

PR-4920



**Windshield Washer
Antifreeze Concentrate**

Cleans, de-ices windshields. Permits use of washer at below zero temperatures. Conditions wiper blades.

Net Content 16 fl. oz.

PR-5016



**Nox-Ice Isopropyl
Gas Line Antifreeze**

Contains isopropyl alcohol. Absorbs twice as much moisture as methanol based products. For gasoline, gasohol, and diesel engines. Excellent in all fuel injected engines.

Net Content 12 fl. oz.

PR-5112



Windshield Spray De-Icer

Defrosts and melts ice from windshields, headlights and windows. Thaws locks in extreme cold weather. Great for removing summer bugs from glass areas.

Net Content 12.3 fl. oz.

PR-5216



Starting Fluid

For gasoline and diesel engines; gives upper cylinder lubrication. Assures safe, smoother starting under any conditions. Gives fast, easy starts in seconds; saves on batteries, towing, and engine wear.

Net Content 11 fl. oz.

PR-5301



Premium Starting Fluid

Extremely high ether content. Gives fast and easy starts in seconds. For use in gasoline or diesel engines. Ideal for cars, trucks, tractors, generators, buses, marine engines, outboards and power mowers. Saves batteries, starters and engine wear. Also provides upper cylinder lubrication.

Net Content 11 fl. oz.

PR-5315




**450° High Temp
DOT 3 Brake Fluid**

Designed to perform safely and efficiently in today's modern, high-heat braking systems. Effective in all DOT 3, ABS, disc and drum braking systems. Meets or exceeds Federal Motor Vehicle Safety Standard 116 and SAE Spec J1703. Dry boiling point exceeds 450°F. Wet boiling point of 284²³⁸/₉₂°F

Net Content 1 gallon

PR-6001

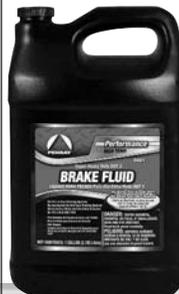

Super Heavy Duty Brake Fluid

Designed to perform safely and efficiently in today's modern, high-heat braking systems. Effective in all DOT 3, ABS, disc and drum braking systems. Meets or exceeds Federal Motor Vehicle Safety Standard 116 and SAE Spec J1703. Dry boiling point exceeds 450°F. Wet boiling point of 284°F.

Net Content 5 gallons

PR-6005



Super Heavy Duty Brake Fluid

Designed to perform safely and efficiently in today's modern, high-heat braking systems. Effective in all DOT 3, ABS, disc and drum braking systems. Meets or exceeds Federal Motor Vehicle Safety Standard 116 and SAE Spec J1703. Dry boiling point exceeds 450°F. Wet boiling point of 284°F.

Net Content 12 fl. oz.

PR-6012



Super Heavy Duty Brake Fluid

Designed to perform safely and efficiently in today's modern, high-heat braking systems. Effective in all DOT 3, ABS, disc and drum braking systems. Meets or exceeds Federal Motor Vehicle Safety Standard 116 and SAE Spec J1703. Dry boiling point exceeds 450°F. Wet boiling point of 284²³⁸/₉₂°F

Net Content 32 fl. oz.

PR-6032



Rubber Lube

Formulated for use in mounting and demounting all types of tires as well as providing enhanced appearance.

Net Content 1 gallon

PR-6501



**Professional
Auto Transmission Flush**

Safely removes dirt and varnish build-up. Restores performance. Reduces friction and wear. Conditions seals and O-Rings. Frees sticky valves. Use with 6534 Professional automatic Transmission Conditioner for a complete service.

Net Content 12 fl. oz.

PR-6533



Universal ATF Protectant

Eliminates need for multiple OEM fluids. Advanced synthetic technology protects all ATF types (except Ford Type F and CVT applications). Enhances Dexron/Mercon ATF to perform like a HFM ATF such as: Chrysler ATF +3(7176), ATF +4(9602), Honda, Toyota Type T IV and other HFM fluids. Enhances Dexron®/Mercon® ATF into a highly stable fluid like Mercon V® ATF. Use with Penray 6533 Professional Automatic Transmission Flush for a complete service.

Net Content 12 fl. oz.

PR-6536



**Transmission MVP
Multi-Vehicle Protectant**

This synthetic technology protectant and modifier is compatible with almost all ATFs and enhances Dexron/Mercon to perform like a Highly Friction Modified ATF.

Net Content 12 fl. oz.

PR-6538



Spray Red Grease

Lubricates and protects hard to reach surfaces. Liquid coating quickly cures into a tough, non-tacky light grease. Functions at extremely low and high temperatures. Prevents corrosive attack to any metal surface. Ideal for protecting tools, linkages, conveyors, couplings, shovels and slides.

Net Weight 11 oz.

PR-7001



Spray Open Gear Lube
Fortified with a finely dispersed Moly Sulfide in addition to a petroleum based extreme pressure lubricant. Ideal for use on all open gears. Resists temperature extremes. Reduces friction from metal-to-metal contact. Also applicable for cutting bars, winches, rollers and presses.

Net Weight 11 oz.

PR-7003



Inner Slide Lube
Contains high concentration of Moly Sulfide. Unique formulation permits clinging to surfaces. Increases slide and piston life. Designed for use on fork lift inner slides, elevator slides, rails, torsion bars, fifth wheels and rollers. Protects against rust and corrosion.

Net Weight 10.5 oz.


PR-7005



Spray Chain Lube
Contains high concentration of Moly Sulfide, synthetic sperm oil and tackiness agent. Provides the ultimate in lubricating qualities, along with a special property that prohibits the product from "flying off" under high velocity applications. Designed for use in many chain drive applications.

Net Weight 10 oz.

PR-7006

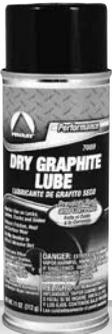

Spray Dry Graphite Lube
Excellent reducer of friction and heat. Lubricates and protects by penetrating into uneven microscopic surfaces. May be applied to wood, metal, plastic, rubber, leather and painted surfaces. Graphite film retards rust and prevents corrosion.

Net Weight 11 oz.

PR-7009



Spray Battery Protector
Prevents build-up of corrosive materials on battery terminals. Eliminates oxidation and seals out moisture. Product is orange tinted to guide user during application.

Net Weight 11.5 oz.

PR-7011



Spray Battery Cleaner
Neutralizes harmful battery acid and helps dissolve common deposits that reduce positive electrical contact.

Net Weight 15 oz.

PR-7012



Spray Electric Motor Cleaner
Safe, non-flammable cleaning agent for electrical system parts. Evaporation is quick, leaving no residue. Extension tube is included for more exacting spray pattern.

Net Weight 19 oz.

PR-7014



Concentrated Motor Flush
Dissolves the sticky and gummy deposits formed by internal combustion. These deposits cling to vital engine parts inside the engine even after an oil and filter change. After using Penray Motor Flush engine oil will circulate freely to all parts of the engine, freeing sticky valves and rings. (Concentrated formulation is added to empty crankcase for complete and thorough cleaning. After engine is run for 5 minutes, drain Motor Flush, continue with maintenance oil and filter change.)

Net Content 1 gallon

PR-7501



Oil System Cleaner
Just 5 minutes prior to oil change add Penray Motor Flush to dissolve the sticky and gummy deposits formed by internal combustion. These deposits cling to vital engine parts inside the engine even after an oil and filter change. After using Penray Motor Flush engine oil will circulate freely to all parts of the engine, freeing sticky valves and rings. (Add Motor Flush to dirty oil, run engine for 5 minutes, continue with maintenance oil and filter change.)

Net Content 12 fl. oz.

PR-7512



Carburetor & Choke Cleaner
High-pressure aerosol spray cleans carburetor in seconds. Helps restore carburetor performance by removing gum, varnish and dirt build-up. Cleans and frees choke and carburetor linkages.

Net Content 11 fl. oz.

SX-115



Liquid Carburetor Cleaner
Prevents problems caused by the presence of deposits on fuel system parts including the carburetor. Allowing these deposits to remain can cause sluggish performance, poor acceleration and high gas consumption. Protects against corrosion and frozen fuel lines by removing moisture as well as cleaning your carburetor which assures easy starting at low temperatures.

Net Content 12 fl. oz.

SX-210



Carburetor Cleaner
Aerosol spray can equipped with extension tube. Spray into carburetor and air-intake. Cleans linkage, anti-smog valve, heat riser and related parts. Removes gum, varnish and carbon deposits.

Net Wt. 14 oz.

SX-215



Engine Medic Oil Treatment
Formulated for use in all engines. Extends engine life and prevents excessive wear. Provides an unbroken film under all conditions to eliminate damage from oil breakdown. Improves efficiency, gas mileage, and air pressure.

Net Content 12 fl. oz.

SX-316



Octane Treatment
Scientifically formulated fuel additive that in leaded or unleaded gasoline will increase octane, reduce engine knock, and improve combustion. Also, protects fuel system from corrosion, prevents freezing, and cleans entire fuel system.

Net Content 12 fl. oz.

SX-340



Fuel Injector & Carburetor Cleaner
Formulated for today's modern fuel injection systems that require more chemical maintenance than carbureted fuel systems. Even the smallest build-up of gum or varnish or the presence of corrosion in the injection system can affect the injector spray pattern causing rough idling, hesitation, and poor performance.

Net Cont. 12 fl. oz.

SX-370



Gas Treatment
Improves gas mileage, repowers sluggish engines and increases engine life. A multi-purpose detergent cleaning additive.

Net Content 12 fl. oz.

SX-380



Gas Treatment
Stops engine oil, transmission fluid and power steering fluid leaks due to drying, hardening and shrinking of seals. Keeps seals soft and pliable. Prevents fluid loss and costly repairs.

Net Content 12 fl. oz.

SX-382



Fuel System Cleaner
Improves gas mileage, repowers sluggish engines and increases engine life. A multi-purpose detergent cleaning additive.

Net Content 16 fl. oz.

SX-384



Power Steering Fluid
Improves gas mileage, repowers sluggish engines and increases engine life. A multi-purpose detergent cleaning additive.

Net Content 12 fl. oz.

SX-400



Power Steering Fluid
Improves gas mileage, repowers sluggish engines and increases engine life. A multi-purpose detergent cleaning additive.

Net Content 32 fl. oz.

SX-404



Motor Flush
Provides fast five minute dissolving of dirt and sludge. Repowers sluggish engines. After treatment, engine oil will circulate freely to all parts of the engine. Also frees sticky valves and rings.

Net Cont. 12 oz.

SX-532



Belt Dressing
Formulated for all types of "V" belts. Reduces squealing, prevents slippage and increases the friction coefficient. Conditions and prolongs belt life. Not recommended for serpentine belts.

Net Content 5 oz.

SX-610



Non Chlorinated Brake Cleaner
Formulated with state of the art, high performance solvents. 45% VOC formula. Formulated to clean brakes, clutch parts and C.V. joints. Removes brake fluid, grease and oil instantly. Helps stop squealing. Does not contain 1, 1, 1, Trichloroethane, hydrocarbon propellants or CFC's. Not Intended for sale in California.

Net Content 10 oz.

SX-630



Emergency Tire Inflator
Seals punctures while inflating tires. Use with any passenger car, truck, boat trailer, or almost any pneumatic tire.

Net Content 12 oz.

SX-659



Emergency Tire Inflator/Hose
Deluxe 12 ounce inflator featuring a flexible hose with a screw-on valve that operates in any position on any automobile or truck tire.

Net Content 12 oz.

SX-660



Emergency Tire Inflator/Hose
Deluxe 16 ounce inflator featuring a flexible hose with a screw-on valve that operates in any position on any automobile or truck tire.

Net Content 16 oz.

SX-665



Super Penetrant
Super tool for car, home, shop and marine. Makes repair work easier whenever trouble is caused by rust, moisture, dirt or friction. Use to start wet engines, loosen frozen parts, protect metal, etc. Harmless to rubber, plastics and painted surfaces.

Net Content 9 oz.

SX-670



Non Chlorinated Brake Cleaner
Quickly and effectively dissolves and removes grease, oil, brake fluid, and other contaminant's from brakes, C.V. joints and clutch components.

Net Content 14 oz.

SX-830



Brake Fluid
Super Heavy Duty 4500 High Temperature D.O.T. 3 Brake Fluid. For use in drum and disc brakes. Exceeds requirements of SAE specs J1703 and Federal specs W-B680A. Surpasses Federal Standards 116.

Net Content 1 Gallon

SX-901



Brake Fluid
Super Heavy Duty 4500 High Temperature D.O.T. 3 Brake Fluid. For use in drum and disc brakes. Exceeds requirements of SAE specs J1703 and Federal specs W-B680A. Surpasses Federal Standards 116.

Net Content 12 fl. oz.

SX-912



Brake Cleaner
Safely dissolves and removes brake fluid, oil, grease, and other contaminant's without disassembling brakes or clutch parts. Non-flammable formula works great on electrical components.

Net Content 19 oz.

SX-930



Brake Fluid
Super Heavy Duty 4500 High Temperature D.O.T. 3 Brake Fluid. For use in drum and disc brakes. Exceeds requirements of SAE specs J1703 and Federal specs W-B680A. Surpasses Federal Standards 116.

Net Content 32 fl. oz.

SX-932



DYNACOPPER RTV SILICONE GASKET MAKER-L/V

Advanced formula instant gasketing material designed for late model vehicles with elevated operating temperatures. Low odor, sensor safe; non-corrosive and manufactured to exceed OEM specifications. Highly flexible and will not leak. Temperature resistant up to 700°F (371°C). Use on valve covers, transmission pans, exhaust manifolds/headers, oil pans, thermostat housing and water pumps.

3.8 oz. (108g) Tube-Carded

DY-47101



DYNAGREY RTV SILICONE GASKET MAKER-L/V

Formulated for import cars. Use to replace most gaskets. High temperature, sensor safe, low odor and non-corrosive. Resists water, oil and anti-freeze. Will not leak. Temperature resistant up to 625°F (329°C). Use on valve covers, oil pans, water pumps, transmission pans, thermostat housings, timing covers and intake manifold end seals.

3.8 oz. (108g) Tube-Carded

DY-47181



DYNABLACK RTV SILICONE GASKET MAKER-L/V

Excellent oil resistance, guaranteed not to leak. Leak proof in the presence of oil, water and anti-freeze. Sensor safe and manufactured to meet OEM specifications. Makes instant gaskets for all engines. Temperature resistant up to 625°F (329°C). Use on valve covers, oil pans, transmission pans, timing covers and intake manifold end seals.

3.8 oz. (108g) Tube-Carded

DY-47200



BLACK RTV SILICONE GASKET MAKER-L/V

Formulated for gasket making applications. Sensor safe and manufactured to meet OEM specifications. Makes instant, leak proof gaskets for all engines, drive train equipment and related components. Temperature resistant up to 500°F (260°C). Resist oil, water, anti-freeze and transmission fluid. Cures tough and flexible. Works on all vehicles.

3.8 oz. (108g) Tube-Carded

DY-49200



RED or BLUE RTV SILICONE GASKET MAKER-L/V

Formulated to withstand higher operating temperatures. Sensor safe and manufactured to meet OEM specifications. Resist cracking and migration caused by thermal cycling. Will not leak. Temperature resistant up to 650°F (343°C)-Red and 500°F (260°C)-Blue. Resist oil, water, anti-freeze and transmission fluid.

3 oz. (85g) Tube-Carded

DY-49202 / DY-49203
Red Blue



CLEAR RTV SILICONE ADHESIVE/SEALANT

Provides transparent, watertight silicone rubber seal for a wide range of applications. Bonds and seals metal, plastics, glass, fabric, vinyl, wood and rubber. Use on windshields, sunroofs, tail lights, interior panels, fire walls and dashboards. Cures at room temperature.

3.8 oz. (108g) Tube-Carded

DY-49204



BLACK RTV SILICONE GASKET MAKER-L/V

Formulated for gasket making applications. Sensor safe and manufactured to meet OEM specifications. Makes instant, leak proof gaskets for all engines, drive train equipment and related components. Temperature resistant up to 500°F (260°C). Resist oil, water, anti-freeze and transmission fluid. Cures tough and flexible. Works on all vehicles.

8 oz. (227g) Automatic Can

DY-49271



RED RTV SILICONE GASKET MAKER-L/V

Formulated to withstand higher operating temperatures. Sensor safe and manufactured to meet OEM specifications. Resist cracking and migration caused by thermal cycling. Will not leak. Temperature resistant up to 650°F (343°C). Resist oil, water, anti-freeze and transmission fluid.

8 oz. (227g) Automatic Can

DY-49272



CLEAR RTV SILICONE ADHESIVE/SEALANT

Provides transparent, watertight silicone rubber seal for a wide range of applications. Bonds and seals metal, plastics, glass, fabric, vinyl, wood and rubber. Use on windshields, sunroofs, tail lights, interior panels, fire walls and dashboards. Cures at room temperature.

8 oz. (227g) Automatic Can

DY-49274



BLUE RTV SILICONE GASKET MAKER-L/V

Replaces most cut gaskets. Sensor safe and manufactured to meet OEM specifications. Resist cracking, shrinking and migration caused by thermal expansion. Cures tough and flexible. Temperature resistant up to 500°F (260°C). Resist oil, water, anti-freeze and transmission fluid. For valve covers, oil pans, transmission pans, rear-end housings, timing chain covers, thermostat housings, water pumps and oil pump flanges.

8 oz. (227g) Automatic Can

DY-49276



BLACK RTV SILICONE GASKET MAKER-L/V

Formulated for gasket making applications. Sensor safe and manufactured to meet OEM specifications. Makes instant, leak proof gaskets for all engines, drive train equipment and related components. Temperature resistant up to 500°F (260°C). Resist oil, water, anti-freeze and transmission fluid. Cures tough and flexible. Works on all vehicles.

11 oz. (312g) Cartridge

DY-49290



RED RTV SILICONE GASKET MAKER-L/V

Formulated to withstand higher operating temperatures. Sensor safe and manufactured to meet OEM specifications. Resist cracking and migration caused by thermal cycling. Will not leak. Temperature resistant up to 650°F (343°C). Resist oil, water, anti-freeze and transmission fluid.

11 oz. (312g) Cartridge

DY-49292



BLUE RTV SILICONE GASKET MAKER

Blue RTV Silicone Gasket Makers a paste-like, one-component material, which cures to a tough, rubbery solid upon exposure to moisture in the air. Formulated for gasket making applications. Sensor safe and manufactured to meet OEM specifications. Makes instant, leak proof gaskets for all engines, drive train equipment, and related components. Resists oil, water, anti-freeze, and transmission fluid. Provides exceptional leak control and torque retention.

11 oz. (312g) Cartridge

DY-49293



CLEAR RTV SILICONE ADHESIVE/SEALANT

Provides transparent, watertight silicone rubber seal for a wide range of applications. Bonds and seals metal, plastics, glass, fabric, vinyl, wood and rubber. Use on windshields, sunroofs, tail lights, interior panels, fire walls and dashboards. Cures at room temperature.

11 oz. (312g) Cartridge

DY-49294



SUPER GLUE

Instantly bonds glass, metal, plastics and rubber. Bonds close fitting parts in seconds. Works on aluminum, copper, brass, steel, vinyl, PVC, polyester, nylon, fiberglass and wood. Holding strength to 5000 psi.

3g Bottle Carded

DY-49403



MUFFLER & TAILPIPE SEALANT

Repairs holes and leaks in mufflers, tailpipes and around joints. Makes new installations more secure. Run engine at idle speed for 20 minutes to harden quickly or allow to sit overnight.

4.5 oz. (128g) Carded

DY-49411



BRUSH-ON ELECTRICAL TAPE

Forms a tough, flexible coating that seals out moisture and corrosion. Adheres to metal, rubber, vinyl and plastic. Dries at room temperature in 5 minutes.

Black 4 oz. Brush Top Can

DY-49412



SUPER GLUE-GEL

Fast and strong repairs. Works on vertical surfaces - will not run. Extra strength formula bonds rubber, vinyl, most plastics, glass, leather, cork and more.

2g Tube Carded

DY-49433



SUPER GLUE-GEL

Fast and strong repairs. Works on vertical surfaces - will not run. Extra strength formula bonds rubber, vinyl, most plastics, glass, leather, cork and more.

20g Tube

DY-49436




BOLTLOCKER BLUE MEDIUM STRENGTH (THREADLOCKING COMPOUND)

Fills gaps up to .006 inches. Apply prior to assembly. Eliminates need for stocking lock nuts and lock washers. Can be removed without special tools.

6ml Tube-Carded

DY-49441

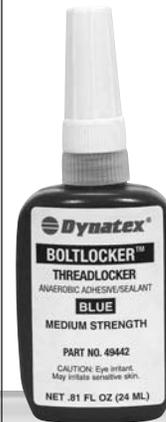

BOLTLOCKER BLUE MEDIUM STRENGTH (THREADLOCKING COMPOUND)

Fills gaps up to .006 inches. Apply prior to assembly. Eliminates need for stocking lock nuts and lock washers. Can be removed without special tools.

24ml Tube-Carded

DY-49442



BOLTLOCKER RED MEDIUM/HIGH STRENGTH (MEDIUM VISC. 1200 - 2000CP)

Locks and seals metal threaded assemblies where high strength is required. Fills gaps up to .008 inches. Apply prior to assembly. Protects against thread corrosion.

6ml Tube-Carded

DY-49451



BOLTLOCKER RED MEDIUM/HIGH STRENGTH (MEDIUM VISC. 1200 - 2000CP)

Locks and seals metal threaded assemblies where high strength is required. Fills gaps up to .008 inches. Apply prior to assembly. Protects against thread corrosion.

24ml Tube-Carded

DY-49452



SLEEVELOCKER GREEN HIGH STRENGTH (SLEEVE RETAINER)

Eliminates press and slip fits. Replaces splines and keys. Returns worn, out-of-tolerance assemblies to fit. Locks and seals studs, shafts and bearings. Fills gaps up to .006 inches.

24ml Tube-Carded

DY-49472



THREAD SEALANT WITH TEFLON*

All-purpose thread sealant. Seals threaded connections for air, oil, diesel fuel and hydraulic oil. Remains pliable. Temperature ranges -65°F to 300°F. Performs better than tapes. Withstands pressures up to 10,000 psi.

*Teflon is a registered trademark of Dupont.

Performs better than tapes
Part No. 49494
CAUTION: Harmful if swallowed. Eye irritant.
PRECAUTION: Dangereux si avalé. Peut irriter les yeux.
Net 4 oz. (113g)

4 oz. (114g) Brush Top Bottle

DY-49494



THREAD SEALANT WITH TEFLON*

All-purpose thread sealant. Seals threaded connections for air, oil, diesel fuel and hydraulic oil. Remains pliable. Temperature ranges -65°F to 300°F. Performs better than tapes. Withstands pressures up to 10,000 psi.

*Teflon is a registered trademark of Dupont.

Performs better than tapes
Holds pressure to 10,000 PSI
Prevents corrosion
Part No. 49495
CAUTION: Harmful if swallowed. Eye irritant.
PRECAUTION: Dangereux si avalé. Peut irriter les yeux.
Net 16 oz. (454g)

16 oz. (454g) Brush Top Bottle

DY-49495



ANTI-SEIZE & LUBRICATION COMPOUND

Prevents carbon fusion and seizure up to 2000°F(1093°C). Protects against corrosion between dissimilar metals. Resists water, salt solution, most shop and automotive fluids. Reduces coefficient of friction by a minimum of 20%. Meets MIL-907 specifications.

High heat protection up to 2000°F
Lowers friction and reduces torque
Part No. 49558
CAUTION: Harmful if swallowed. Eye irritant.
PRECAUTION: Dangereux si avalé. Peut irriter les yeux.
Net 8 oz. (226.8g)

8 oz. (227g) Brush Top Bottle

DY-49558



ANTI-SEIZE & LUBRICATION COMPOUND

Prevents carbon fusion and seizure up to 2000°F(1093°C). Protects against corrosion between dissimilar metals. Resists water, salt solution, most shop and automotive fluids. Reduces coefficient of friction by a minimum of 20%. Meets MIL-907 specifications.

16 oz. Aerosol Can
12 oz. (340g) Net Wt.

DY-49576




ANTI-SEIZE & LUBRICATION COMPOUND

Prevents carbon fusion and seizure up to 2000°F(1093°C). Protects against corrosion between dissimilar metals. Resists water, salt solution, most shop and automotive fluids. Reduces coefficient of friction by a minimum of 20%. Meets MIL-907 specifications.

Copper 8 oz. Brush Top Bottle
Contains more copper

DY-49582

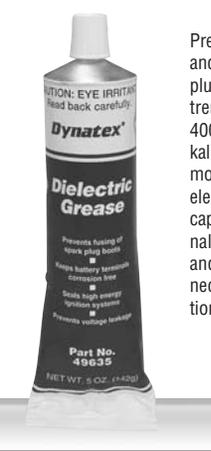

DIELECTRIC GREASE

Prevents boot tears, corrosion, arcing and the fusing of spark wires to spark plugs. Maintains its consistency in extreme temperatures from -40°F to 400°F. Resists moisture, acids and alkalines. Moisture proof seal for automotive, marine and other ignition and electrical systems. For distributor caps, battery cables, posts and terminals, light bulb sockets, trailer hitch and all other types of electrical connectors. Complies with FDA Regulation 21 CFR178.3570.

5 oz. (142g) Tube Boxed

DY-49635



HEAT SINK GREASE

A grease-like silicone material, heavily filled with heat conductive metal oxides. Used as a heat transfer medium in electrical and electronic applications for facilitating heat dissipation. Withstands high and low temperatures (-65°F to 400°F), water resistant chemically inactive and hydrolytically stable. Has also been found useful on thermocouple and thermometer wells, mounting semi-conductor devices and thermal joints. NLGI No. 2.

5 oz. (142g) Tube-Boxed

DY-49643




GASKET REMOVER

A grease-like silicone material, heavily filled with heat conductive metal oxides. Used as a heat transfer medium in electrical and electronic applications for facilitating heat dissipation. Withstands high and low temperatures (-65°F to 400°F), water resistant chemically inactive and hydrolytically stable. Has also been found useful on thermocouple and thermometer wells, mounting semi-conductor devices and thermal joints. NLGI No. 2.

16 oz. Aerosol Can
13 oz. (368g) Net Wt.

DY-49673

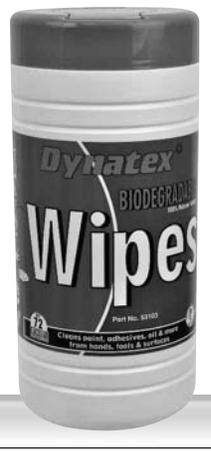


BIODEGRADABLE WIPES

Biodegradable Wipes remove the toughest grease, tar, grime, ink, paints, sealants, adhesives and other difficult soils. Each pre-moistened wipe is made of all natural fabric that has been engineered for softness and absorbency to give it a superb towel like feel. Made from all biodegradable ingredients that are 100% compostable and made without harmful chemicals. They are ideal for use on most hard surfaces including: painted walls, tools, work surfaces, signs, siding, bathroom partitions and more.

Qty 72 - 8" x 12"

DY-53103

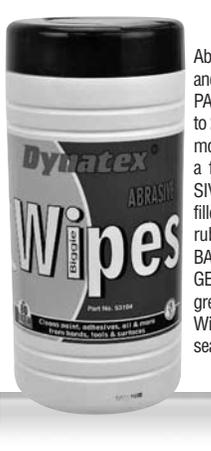

DUAL-SIDED ABRASIVE WIPES

Abrasive Wipes Clean paint, adhesive, oil and more from hands, tools and surfaces. PAINT-Oil and Water based. Effective up to 24 hours after application. To assist removal of dry paint, place wipe on spill for a few minutes to soften paint. ADHESIVES AND SEALANTS-Silicone, acrylic, fillers, poly adhesive, poly foam, epoxy, rubber cement and label residue. OIL BASED STAINS-Oil, grease, ink and more. GENERAL CLEANING-Ideal for stain and grease removal from most work surfaces. Will refresh and clean old paint and sealants.

Qty 80 - 8" x 12"

DY-53104



HAND CLEANER

Dynatex All Purpose Hand Cleaner with lanolin is a creamy formula that liquefies and gently lifts grease, grime and stains from the hands safely with or without water. Dynatex All Purpose Hand Cleaner leaves hands cleaned and conditioned without the greasy feeling and strong odors of competitive brands. Dynatex All Purpose Hand Cleaner contains lanolin and skin care emollients to aid in healing rough, dry and overused hands.

5 oz. (142g) Tube-Boxed

DY-53108



WHEEL BEARING GREASE

A premium state-of-the-art lithium complex grease, this multi-purpose lubricant has a high dropping point in excess of 500°F, which ensures retention where high temperatures are encountered. An excellent bearing lubricant for car truck trailers, sports vehicles and plant equipment. Particularly recommended for disc brake equipped vehicles. Excellent water resistor and rust inhibitor. NLGI No. 2

1 lb. Can

DY-54016

ANTIFREEZE



1 Gallon (Concentrate)

AF-2030

ANTIFREEZE



1 Gallon (50/50 Premix)

AF-2140

ANTIFREEZE



1 Gallon (50/50 Premix)

AF-2250

ANTIFREEZE



1 Gallon (Concentrate)

AF-2360

GEAR LUBRICANT



5 Gallon (80W-90)

GL-8090

GEAR LUBRICANT



5 Gallon (85W-140)

GL-8514

HYDRAULIC OIL



5 Gallon (AW 32)

HF-9032

HYDRAULIC OIL



5 Gallon (AW 46)

HF-9146

MOTOR OIL



1 Quart (5W 20)

MO-1010

GREASE (LITHIUM)



Moly EP

GR-9060

GREASE (LITHIUM)



Ultra EP

GR-9000

GREASE (LITHIUM)



Multi-Purpose

GR-9020

COOLENT TESTER



Anti-Freeze Tester - Ball Type

00233

COOLENT TESTER



Anti-Freeze Tester - Dial Type

00234

MOTOR OIL



1 Quart (5W-30)

MO-2020

MOTOR OIL



1 Quart (10W-30)

MO-3030

MOTOR OIL



1 Quart (10W-40)

MO-4040

MOTOR OIL



1 Quart (20W-50)

MO-5050

MOTOR OIL



1 Quart (15W-40 HD)

MO-6060

MOTOR OIL



1 Gallon (15W-40 HD)

MO-7285

MOTOR OIL (SYNTHETIC)



1 Quart (5W-30)

MO-8010

MOTOR OIL (SYNTHETIC)



1 Quart (5W-30)

MO-8085

MOTOR OIL (SYNTHETIC)



1 Quart (10W-30)

MO-9015

TRANSMISSION FLUID



5 Gallon

TF-6060

TRANSMISSION FLUID



1 Quart

TF-7070

TRACTOR FLUID



5 Gallon

TF-8080